


PIN OUT

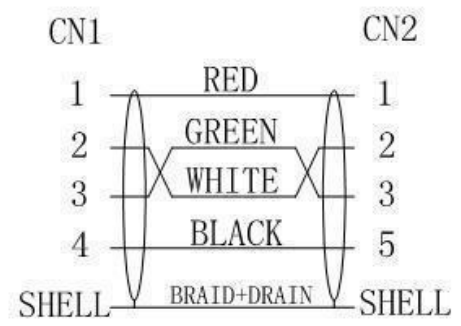

- 1. Wire: 2725 28 AWG/1P+ 28AWG/2C (7/0.12TCx4C+AL+16/4/0.10TC) x 1C OD 3.5mm
- 2. USB A Male connector, gold plated contacts
- 3. USB Micro 5P Male Connector, gold plated contacts
- 4. Standard wire length = 1500mm

ELECTRICAL TEST:

- 1. 100% open, short and missing wire test
- 2. Insulation resistance: 5M Ohms 300 V DC
- 3. Dielectric strength: 150V AC, 1mA
- 4. Contact resistance: 5 Ohms max.

RoHS Compliant

Marking: AWM 2725 VW-1 80°C 30V
 28AWG/1P+28AWG/2C HIGH SPEED USB2.0
 CABLE -LF- PRAN

Part code: USB-AM-Micro 5P-1500