

1. Wire: 2725 28 AWG/1P+ 28AWG/2C
(7/0.12TCx4C+AL+16/4/0.10TC) x 1C OD 3.5mm
2. USB A Male connector, gold plated contacts
3. USB Mini 5P Male Connector, gold plated contacts
4. Standard wire length = 1500mm


ELECTRICAL TEST:

1. 100% open, short and missing wire test
2. Insulation resistance: 5M Ohms 300 V DC
3. Dielectric strength: 150V AC, 1mA
4. Contact resistance: 5 Ohms max.

RoHS Compliant

Marking: AWM 2725 VW-1 80°C 30V
28AWG/1P+28AWG/2C HIGH SPEED USB2.0
CABLE -LF- PRAN

PIN OUT

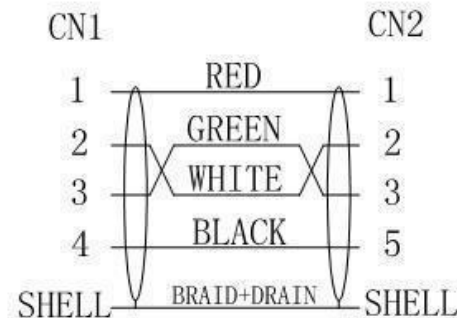

Part code: USB-AM-Mini5PB-1500

