
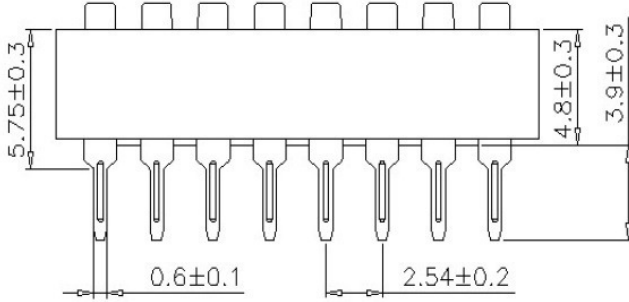
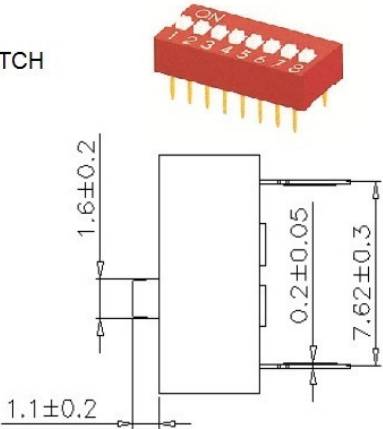


PART NUMBER: PS-DS-XX (02-12)  
 DESCRIPTION: DIP SWITCH 2 to 12 WAY  
 GOLD PLATED PROFESSIONAL GRADE DIP SWITCH

ROHS COMPLIANT

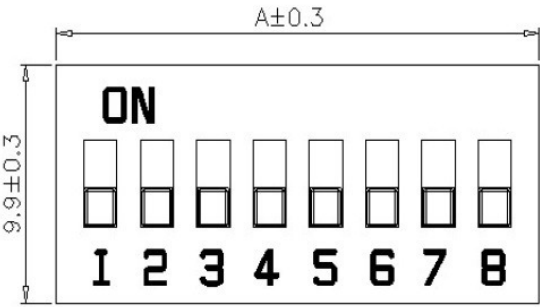


DIMENSION A (General tolerance: ±0.3)


POSITIONS	2	3	4	5	6	7	8	9	10	12
A	6.7	9.3	11.8	14.4	16.9	19.4	22.0	24.6	27.2	32.2

**Specification**

	Items	Standard
Environmental	Operation Temperature Range	-20°C to +70°C
	Storage Temperature Range	-40°C to +85°C
Electrical performance	Electrical Life	2,000 operations
	Non-Switching Rating	100mA,50VDC
	Switching Rating	25mA,24VDC
Mechanical performance	Operating force	1,000gf max.
	Stroke	2.0mm

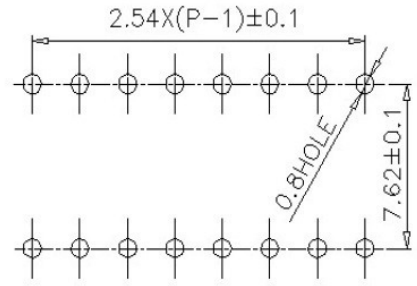

PCB LAYOUT

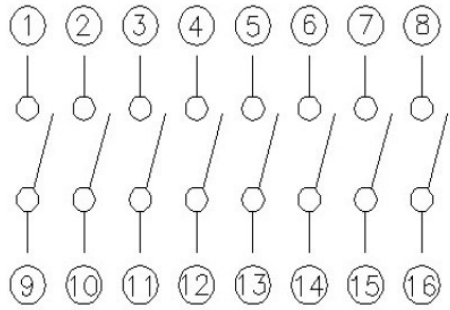

CIRCUIT DIAGRAW

**PACKING**

All DIP Switches are packed in standard IC tubes.

NO. OF POS	PER TUBE
2	70PCS
3	51PCS
4	40PCS
5	33PCS
6	28PCS
7	24PCS
8	21PCS
9	19PCS
10	17PCS
12	14PCS