

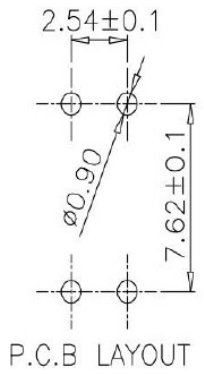
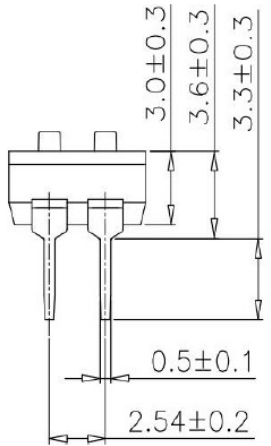


Part Code: PS-DS-LP-02  
 DIP SWITCH LOW PROFILE 2 Way  
 Professional quality Gold plated switch

ROHS COMPLIANT

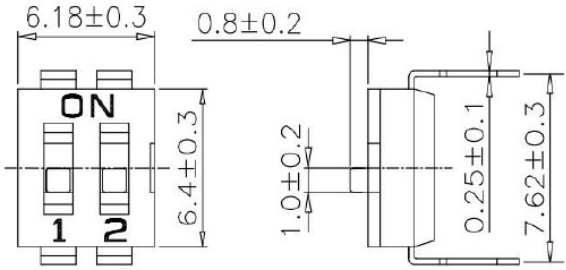

**Specification**

|  |                     |                              |  |
|--|---------------------|------------------------------|--|
| Contact Resistance ( initial )         | 50mΩ Max.           | Operation Force              | 8N Max.                                    |
| Contact Resistance ( after life test ) | 100mΩ Max.          | Mechanical life              | 2000 operations                            |
| Contact Rating ( switching )           | 25mA 24VDC          | Operating Temperature        | -25°C ~ +70°C                              |
| Contact Rating ( steady stage )        | 100mA               | Storage Temperature          | -40°C ~ +85°C                              |
| Insulation Resistance                  | 1000MΩMin.at 500VDC | Solder Ability               | After flux 235±5°C for 5 ±0.5s,95%coverage |
| Dielectric Strength                    | 500V AC.for 60s.1mA | Resistance to soldering heat | 260±5°C for 5± 1seconds                    |

TUBE PACKING Quantity 77 pcs./tube for 2 Way Switch